

Please read and save these instructions. Read through this owner's manual carefully before using product. Protect yourself and others by observing all safety information, warnings, and cautions. Failure to comply with instructions could result in personal injury and/or damage to product or property. Please retain instructions for future reference.



## 4 IN 1 AUTO EMERGENCY TOOL

### FOR CUSTOMER SERVICE

Technical Question?

**CALL 1-866-458-2472**

**customerservice@oem-tools.com**

### UNPACKING

After unpacking unit, inspect carefully for any damage that may have occurred during transit. Check for loose, missing, or damaged parts. If any damage is observed, a shipping damage claim must be filed with carrier. Do not use Auto Emergency Tool if broken, bent, cracked or damaged parts (including labels) are noted. Any Auto Emergency Tool that appears damaged in any way, operates abnormally or is missing parts should be removed from service immediately. If you suspect that the Fluid Dispensing System was subjected to a shock load (a load that was dropped suddenly, unexpectedly, etc.) immediately discontinue use until it has been checked by a factory authorized service center.



### **WARNING**

This is the safety alert symbol. It is used to alert you to potential personal injury hazards. Obey all safety messages that follow this symbol to avoid possible injury or death.



## 4 IN 1 AUTO EMERGENCY TOOL

Thank you very much for choosing an OEMTOOLS Product!

For future reference, please complete the owner's record below:

**Model:** \_\_\_\_\_ **Purchase Date:** \_\_\_\_\_

Save the receipt, warranty and these instructions. It is important that you read the entire manual to become familiar with this product before you begin using it. This machine is designed for certain applications only. OEMTOOLS cannot be responsible for issues arising from modification. We strongly recommend this machine is not modified and/or used for any application other than that for which it was designed. If you have any questions relative to a particular application, DO NOT use the machine until you have first contacted OEMTOOLS to determine if it can or should be performed on the product.

**For technical questions please call 1-866-458-2472.**



### IMPORTANT INSTRUCTIONS AND SAFETY RULES

1. Know your tool. Read this manual carefully. Learn the tool's applications and limitations, as well as, potential hazards specific to it.
  2. Keep children away. Never let a child handle a tool without strict adult supervision.
  3. Check for damage. Check your tool regularly. If part of the tool is damaged it should be carefully inspected to make sure that it can perform its intended function correctly. If in doubt, the part should be repaired. Refer all servicing to a qualified technician. Consult your dealer for advice.
  4. Store idle tools out of the reach of children and untrained persons. Tools may be dangerous in the hands of untrained users.
- Maintain tools with care.
  - Properly maintained tools are less likely to bind and are easier to control. Do not use a damaged tool. Tag damaged tools "Do not use" until repaired.
  - Check for misalignment or binding of moving parts, breakage of parts, and any other condition that may affect the tool's operation.
  - If damaged, have the tool serviced before using. Many accidents are caused by poorly maintained tools.

- Use only accessories that are recommended by the manufacturer for your model. Accessories that may be suitable for one tool may become hazardous when used on another tool.
- Tool service must be performed only by qualified repair personnel. Service or maintenance performed by unqualified personnel could result in a risk of injury.
- When servicing a tool, use only identical replacement parts. Use of unauthorized parts or failure to follow maintenance instructions may create a risk of injury.
- Maintain labels and nameplates on this product. These carry important information. If unreadable or missing, contact OEM for a replacement.
- The warnings, precautions, and instructions discussed in this manual cannot cover all possible conditions and situations that may occur. The operator must understand that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.
- We believe the information contained herein to be reliable. However, general technical information is given by us without charge and the user shall employ such information at his own discretion and risk. We assume no responsibility for results or damages incurred from the use of such information in whole or in part. Always refer to specific instructions and technical information supplied by vehicle manufacturer.



**This product contains batteries.  
IF SWALLOWED, batteries could cause severe  
injury or death.  
SEEK MEDICAL ATTENTION IMMEDIATELY.**

- DO NOT dispose of batteries in fire, batteries may explode or leak.
- DO NOT mix old and new batteries.
- DO NOT mix alkaline, standard (carbon-zinc) or rechargeable (nickel-cadmium) batteries.
- REMOVE BATTERIES from equipment which is not to be used for an extended period of time.
- The manufacturer declines any and all responsibility for damage to vehicles or components if said damage is the result of unskillful handling by the operator or of failure to observe the basic safety rules set forth in the instruction manual.



## 4 IN 1 AUTO EMERGENCY TOOL


### DISPOSAL

At the end of the useful life of the Auto Emergency Tool, dispose of the components according to all state, federal, and local regulations

### PURPOSE

The intended use for this Auto Emergency Tool is as a Digital Tire Gauge, Flashlight, Emergency Glass Breakage Hammer and an Emergency Seat Belt Cutter

Figure	Description	Quantity
24505-1	Hammer Tip	1
24505-2	Flashlight	1
24505-3	Flashlight On Off Switch	1
24505-4	Power-On Mode Button	1
24505-5	Up Button	1
24505-6	Down Button	1
24505-7	Seat Belt Cutting Tool Blade	1
24505-8	Tire Pressure Gauge Nozzle (Not Shown)	1
24505-9	Battery Cover (Not Shown)	1
24505-10	Battery Cover Screw (Not Shown)	1

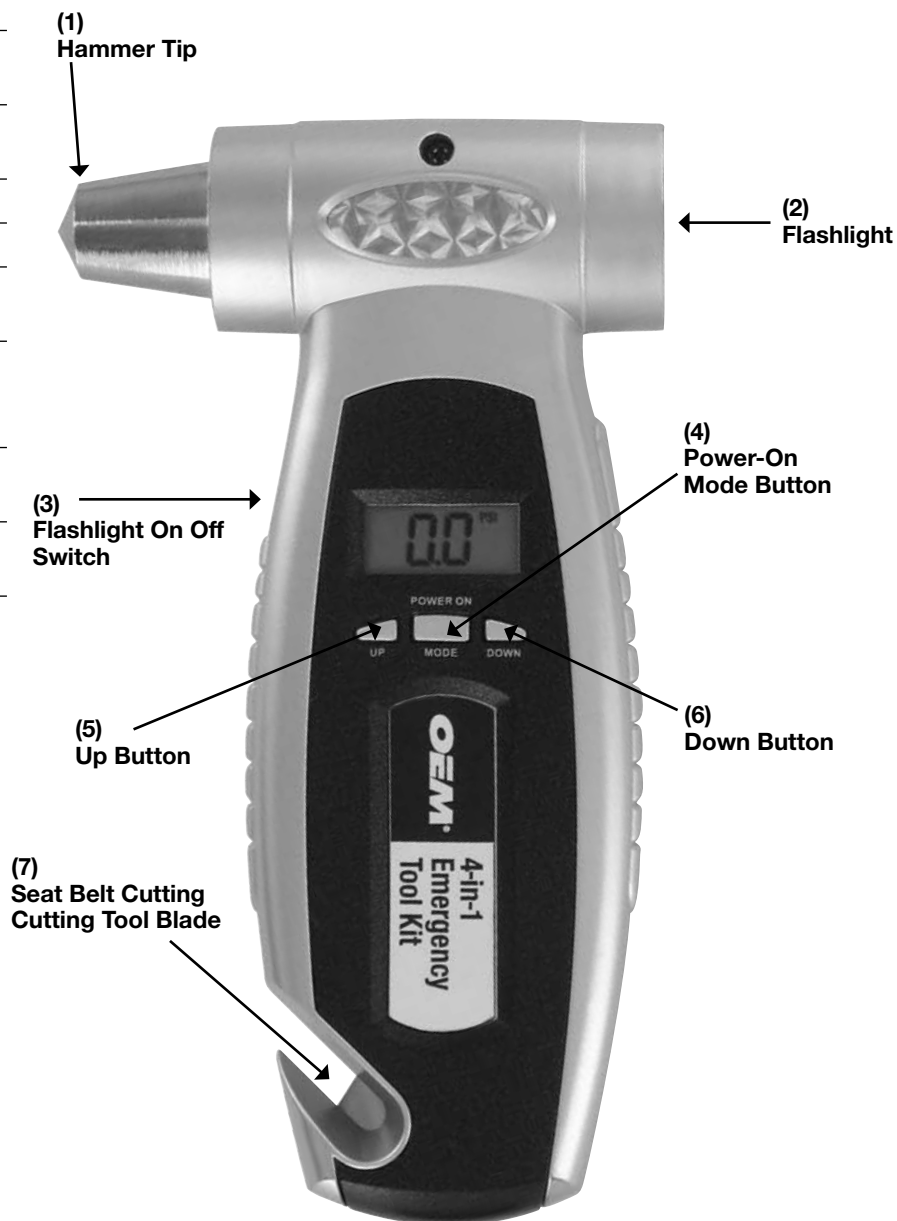



## 4 IN 1 AUTO EMERGENCY TOOL



Always wear safety glasses and gloves!

**BEFORE USING, REMOVE PULL TAB TO ACTIVATE BATTERY.**

### OPERATING INSTRUCTIONS

1. Firmly grasp Pull Tab extending out of the Battery Door and pull completely out of unit.
2. Your Auto Emergency Tool is now operational.



3. The Seat Belt Cutting Tool is intended only to cut seat belt webbing if a seat belt does not unlatch during an emergency situation.

**The blade is sharp. Use extreme care when handling this tool.**

4. Loosen the seatbelt as much as possible. Hook the seatbelt into the blade, and pull up/down, continuing to pull as the blade cuts through the belt. Release other passengers, small children first, from their restraints.
5. The Emergency Hammer Tool is intended only to break tempered automobile door window glass during a vehicular accident. Unit will not break windshields or other windows made of laminated glass.
6. Break a side window by swinging the Auto Emergency Tool overhand, like a household hammer. Strike the door glass with the pointed metal end of the tool. One or two strikes should shatter the glass.
7. SHIELD your eyes and face from the glass, and instruct others to do the same. Use the tool to scrape the remaining glass from the window edges.
8. Breaking the front and rear windshield is difficult, dangerous, and will take longer. The Auto Emergency Tool is designed for a quick and safe escape, and the side windows are the only recommended route of escape.

**Use the Hammer and Seat Belt Cutting Tool in emergency only.**

**DO NOT use for any other purpose. This is not a toy**

9. Flash Light Operation: To turn on the flashlight press the side button below the hammer. Press the button again to turn off. The flashlight uses 2 AAA batteries.
10. Digital Tire Gauge Operation: When the LCD display reads "0.0" PSI, the gauge is ready to measure tire pressure. Select the pressure unit of measure of PSI, BAR or KPA by using the ON button. Hold the gauge in place on the tire valve stem until the LCD display displays the pressure. Remove the Tire Pressure Gauge and read the pressure. The gauge will shut off after 30 seconds. The Tire Pressure Gauge can be preset with a warning value. Just press the MODE button and hold for about 2 seconds. The LCD Display will begin flashing, then press the UP or DOWN button to select the warning value. Press MODE button to return to the main screen.

### MAINTENANCE

1. The unit requires 2, AG8 Button Cell Batteries to power the Digital Tire Gauge and 2, AAA Alkaline Batteries for the Flashlight
2. Battery Replacement: Using a small Phillips head screwdriver, loosen the screw in the battery cover and remove the battery cover, being careful not to drop or lose the screw.
3. It may be helpful to use a pocket screwdriver to help remove the old batteries. Install the new batteries paying attention to the direction indicated, then reinstall the cover and cover screw.



## 4 IN 1 AUTO EMERGENCY TOOL

### OEMTOOLS™ YEAR LIMITED WARRANTY

From one year from the original purchase date of this product, OEMTOOLS will warranty this product. If you find any defect in material or workmanship, through normal usage, return it to the place of purchase or to OEMTOOLS for repair or replacement at our discretion. In order to obtain this service send your tool and proof of purchase, transportation pre-paid, to OEMTOOLS Q.A. Dept., 3850 Raines Road #3, Memphis. We will not be responsible for lost or damaged goods during transportation, please insure your package. If our inspection verifies the defect, we will either repair or replace the product at our election, or we may elect to refund the purchase price if we cannot readily and quickly provide you with a replacement. We will return repaired products at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of returning the product.

OEMTOOLS does not provide warranty for products labeled other than OEM or OEMTOOLS. OEMTOOLS will not provide any warranty for products subjected to abnormal use. Abnormal use includes, but is not limited to, abuse, accident, alteration, neglect, and unauthorized or unreasonable use or repairs. This warranty does not cover bits, blades, files, batteries, or calibration. We recommend that you maintain your tools and sharpen or replace blades, bits, files, and batteries as necessary. OEMTOOLS reserves the right to make any changes in construction or design at any time without any obligation in incorporating such changes to tools or equipment previously sold.

OEMTOOLS makes every effort to assure that its products meet high quality and durability standards, and warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of one year from the date of purchase. This warranty does not apply to damage due directly or indirectly to misuse, abuse, negligence or accidents, repairs or alterations outside our facilities, criminal activity, improper installation, normal wear and tear or to lack of maintenance.

We shall in no event be liable for death, injuries to persons or property, or for incidental, contingent, special or consequential damages arising from the use of our product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.