

Please read and save these instructions. Read through this owner's manual carefully before using product. Protect yourself and others by observing all safety information, warnings, and cautions. Failure to comply with instructions could result in personal injury and/or damage to product or property. Please retain instructions for future reference.



16' DUCT ATTACHMENT FOR 12" BLOWER FAN

FOR CUSTOMER SERVICE


Technical Question?

CALL 1-866-458-2472

customerservice@oem-tools.com

UNPACKING

After unpacking the unit, inspect carefully for any damage that may have occurred during transit. Check for loose, missing, or damaged parts. If any damage is observed, a shipping damage claim must be filed with the carrier. DO NOT use the OEMTOOLS™ 24898 16' Duct Attachment if broken, bent, cracked or damaged parts (including labels) are noted. Any Duct Attachment that appears damaged in any way, operates abnormally or is missing parts should be removed from service immediately. If you suspect that the Duct Attachment was subjected to shock load (a load that was dropped suddenly, unexpectedly, etc.), immediately discontinue use until it has been checked by a factory authorized service center.

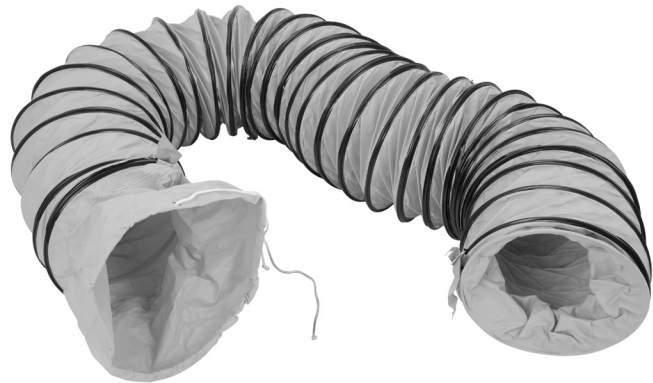

**Note: For Use with the OEMTOOLS™
24897 12" Cylinder Blower Fan**

▲ WARNING

The following safety information is provided as a guideline to help you operate your Duct Attachment under the safest possible conditions. Any tool or piece of equipment can be potentially dangerous to use when safety or safe handling instructions are not known or not followed. The following safety instructions are to provide the user with the information necessary for safe use and operation. Please read and retain these instructions for the continued safe use of your Duct Attachment. Failure to follow instructions listed below may result in serious injury. In addition, make sure that anyone who uses the equipment understands and follows these safety instructions as well.

Explanation of Safety Signal Words

▲ WARNING: Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

▲ CAUTION: Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury.

CAUTION: Used without the safety alert symbol indicates a potentially hazardous situation which, if not avoided, may result in property damage.

NOTES: Provide clarity and helpful information.

Thank you very much for choosing an OEMTOOLS™ Product!

For future reference, please register your new tool at www.oem-tools.com and complete the owner's record below:

Model: _____ **Purchase Date:** _____

Save the receipt, warranty and these instructions. It is important that you read the entire manual to become familiar with this product before you begin using it. This product is designed for certain applications only. OEMTOOLS™ cannot be responsible for issues arising from modification. We strongly recommend this product is not modified and/or used for any application other than that for which it was designed. If you have any questions relative to a particular application, DO NOT use the product until you have first contacted customer service to determine if it can or should be performed on the product.



16' DUCT ATTACHMENT FOR 12" BLOWER FAN



IMPORTANT INSTRUCTIONS AND SAFETY RULES

1. Know your product. Read this manual carefully. Learn the product's applications and limitations as well as the potential hazards specific to it.
2. Keep work area clean and well lit. Cluttered or dark work areas invite accidents.
3. Keep children away. All children should be kept away from the work area. Never let a child handle tools or equipment without strict adult supervision.
4. DO NOT operate this product if under the influence of alcohol or drugs. Read warning labels on prescriptions to determine if your judgment or reflexes are impaired while taking drugs. If there is any doubt, DO NOT attempt to operate.
5. Use safety equipment. Eye protection should be worn at all times when operating this tool. Use ANSI approved safety glasses. Everyday eyeglasses are NOT safety glasses. Dust mask, non-skid safety shoes, hard hat or hearing protection should be used in appropriate conditions.
6. Wear proper apparel. Loose clothing, gloves, neck-ties, rings, bracelets or other jewelry may present a potential hazard when operating this product. Keep all apparel clear of the product.
7. DO NOT overreach. Keep proper footing and balance at all times when operating this product.
8. Check for damage. Check equipment regularly. If part of the product is damaged, it should be carefully inspected to make sure that it can perform its intended function correctly. If in doubt, discontinue use of product.
9. Keep away from flammables. DO NOT attempt to operate this product near flammable materials or combustibles. Failure to comply may cause serious injury or death.
10. Store this product out of the reach of children and untrained persons. This product may be dangerous in the hands of untrained users.
11. Keep this product dry and clean.
12. Use only accessories that are recommended by the manufacturer for your model. Accessories that may be suitable for one product may become hazardous when used on another product.
13. Service must be performed only by qualified repair personnel. Service or maintenance performed by unqualified personnel could result in a risk of injury.
14. When servicing a product, use only identical replacement parts. Use of unauthorized parts or failure to follow maintenance instructions may create a risk of injury.
15. Maintain a safe working environment. Keep the work area well lit. Make sure there is adequate

surrounding workspace. Keep the work area free of obstructions, grease, oil, trash, and other debris. DO NOT use this product in a damp or wet location.

16. Maintain labels and nameplates on this product. These carry important information. If unreadable or missing, contact OEMTOOLS™ for a replacement.
17. Keep this product dry, clean, and free from brake fluid, oil, and grease.
18. Avoid accidental fire. DO NOT smoke near this product.
19. The warnings, precautions, and instructions discussed in this manual cannot cover all possible conditions and situations that may occur. The operator must understand that common sense and caution are factors which cannot be built into this product, but must be supplied by the operator.
20. We believe the information contained herein to be reliable. However, general technical information is given by us without charge and the user shall employ such information at their own discretion and risk. We assume no responsibility for results or damages incurred from the use of such information in whole or in part.
21. The manufacturer declines any and all responsibility for property damage or injury if said damage is the result of unskillful handling by the operator or of failure to observe the basic safety rules set forth in the instruction manual.
22. The procedures documented in this manual are to serve as guidelines for the use of this equipment.
23. The use of this equipment is simple and straightforward if you follow the instructions. When operating this equipment, use common sense, and only use this equipment for its intended purpose.

PRODUCT DESCRIPTION

The OEMTOOLS™ 16' Duct Attachment is designed for use with the OEMTOOLS™ 24897 Cylinder Blower Fan. This attachment can also be used with other 12" blower fans with cylinders less than 13.5" in diameter.

PRODUCT SPECIFICATIONS

Fitment	24897 and other 12" Blower Fans
Duct Length	16'
Weight	8.6 Lbs.
Material	Vinyl

CONTENTS

- (1) Duct Attachment, (1) Instruction Manual





16' DUCT ATTACHMENT FOR 12" BLOWER FAN

SPECIFIC SAFETY INSTRUCTIONS AND WARNINGS

▲ WARNING: Thoroughly read and understand the provided product manual before attempting to use this product.

▲ WARNING: DO NOT attempt to disassemble, repair or modify this attachment.

▲ WARNING: DO NOT place the attachment over face or head; this poses a risk of suffocation.

▲ WARNING: DO NOT allow children or pets to enter the attachment; this poses a risk of suffocation.

▲ WARNING: DO NOT operate near a heat source or open flame.

▲ WARNING: DO NOT submerge this attachment in water or other liquids.

CAUTION: DO NOT attempt to stretch this attachment to fit cylinder diameters larger than 13.5"; this may lead to product malfunction.

OPERATION INSTRUCTIONS

1. Place the fan onto a clean, protected surface that can support the weight of the fan. Ensure the fan is placed at a distance that does not overextend the cord or place tension on the plug.
2. Secure the Duct Attachment to extract or ventilate air:
 - a. Extract: Secure the attachment input side (opposite of air flow) by pulling the Adjustment Cord and knotting tightly. Place the open end of the Duct Attachment in the location where air is to be extracted.
 - b. Ventilate: Secure the attachment to output side (direction of air flow) by pulling the Adjustment Cord and knotting tightly. Place the open end of the Duct Attachment in the location where air is to be ventilated.

NOTE: The Duct Attachment can be suspended from a wall or ceiling using the D-Rings featured on the midpoint and open end of the Duct Attachment.

3. Plug the fan into a grounded 120V / 60 Hz outlet.
4. (FOR 24897) Test GFCI (Ground Fault Circuit Interrupter) before each use.
 - a. Press the RESET button. Indicator should turn red.
 - b. Press the TEST button. Indicator should turn off.
 - c. Press the RESET button again before attempting to use.
 - d. DO NOT ATTEMPT TO USE IF GFCI TEST FAILS. Call customer service for assistance.

5. (FOR 24897) Adjust to the desired speed with the toggle switch:
 - 0 – OFF
 - 1 – Low
 - 2 – High
6. Turn the fan to OFF before unplugging from the electrical outlet.

STORAGE

Store the Duct Attachment in an upright position and in a clean, dry area. DO NOT store near flammable items or open flames.

PRODUCT MAINTENANCE

▲ WARNING: Unplug the fan and remove Duct Attachment before performing maintenance on the Duct Attachment.

▲ WARNING: DO NOT use solvents or cleaners to wipe/clean the duct attachment. This may lead to product failure or malfunction.

After disconnecting the Duct Attachment, use a clean, damp cloth to wipe any dust from the outside of the attachment. Allow the Duct Attachment to sit fully extended to dry before storing or attempting to use with a fan.


DISPOSAL

At the end of the useful life of the OEMTOOLS™ Duct Attachment, dispose of the components in accordance with all federal, state and local regulations.



16' DUCT ATTACHMENT FOR 12" BLOWER FAN

PRODUCT LAYOUT

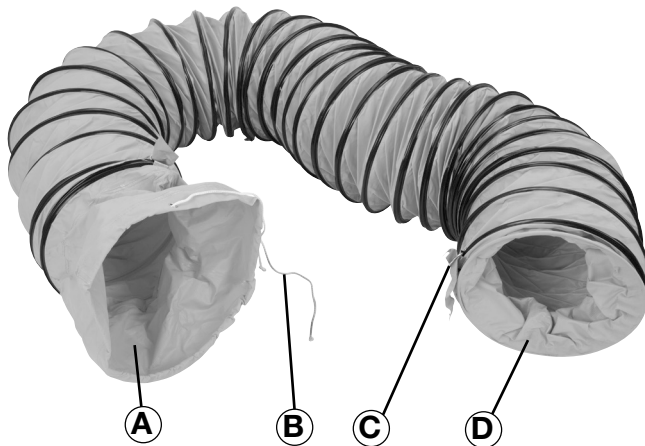

PARTS DESCRIPTION

Item	Description	Quantity
A	Fan Attachment End	1
B	Adjustment Cord	1
C	D-Ring for Hanging	2
D	Open End	1

OEMTOOLS™ 90 DAY LIMITED WARRANTY

For 90 days from the original purchase of this product, OEMTOOLS™ will warranty this item. If you find any defect in material or workmanship, through normal usage, return it to the place of purchase or to OEMTOOLS™ for repair or replacement at our discretion. In order to obtain this service, send your tool and proof of purchase, transportation pre-paid, to OEMTOOLS™ Q.A. Dept., 3850 Raines Road #3, Memphis, TN 38118. We will not be responsible for lost or damaged goods during transportation; please insure your package. If our inspection verifies the defect, we will either repair or replace the product at our election, or we may elect to refund the purchase price if we cannot readily and quickly provide you with a replacement. We will return repaired products at our expense, but if we determine there is no defect, or that the defect resulted from causes not within the scope of our warranty, then you must bear the cost of returning the product.

OEMTOOLS™ does not provide warranty for products labeled other than OEM® or OEMTOOLS™. OEMTOOLS™ will not provide any warranty for products subjected to abnormal use. Abnormal use includes, but is not limited to, abuse, accident, alteration, neglect, and unauthorized or unreasonable use or repairs. This warranty does not cover bits, blades, files, batteries, or calibration. We recommend that you maintain your tools and sharpen or replace blades, bits, files, and batteries as necessary. OEMTOOLS™ reserves the right to make any changes in construction or design at any time without any obligation in incorporating such changes to tools or equipment previously sold.

OEMTOOLS™ makes every effort to ensure that its products meet high quality and durability standards, and warrants to the original purchaser that this product is free from defects in materials and workmanship for the period of 90 days from the date of purchase. This warranty does not apply to damage due directly or indirectly to misuse, abuse, negligence or accidents, repairs or alterations outside our facilities, criminal activity, improper installation, normal wear and tear or to lack of maintenance.

We shall in no event be liable for death, injuries to persons or property, or for incidental, contingent, special or consequential damages arising from the use of our product. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation of exclusion may not apply to you. THIS WARRANTY IS EXPRESSLY IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS. This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.

Don't forget to register your new OEMTOOLS™ product at www.oem-tools.com.

CONTACT US

3580 E. Raines Road, Suite 3, Memphis, TN 38118
 Tel: 1-866-458-2472
www.oem-tools.com